


## Rely on MTI...

Thermowells are used to shield the sensor against corrosion, mechanical damage and other variables. These wells are designed to protect sensors from the process elements while permitting easy installation of sensor replacements.

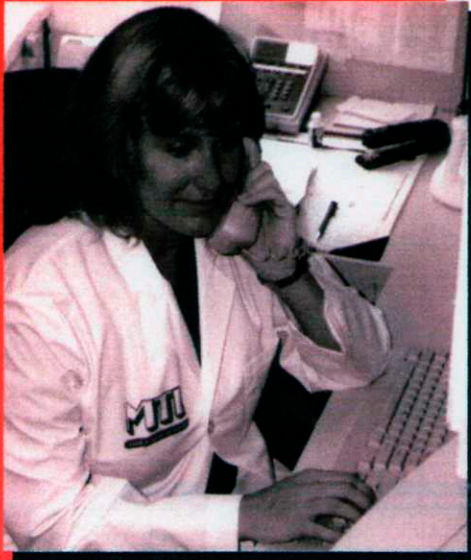

Thermowell material must be compatible with the process environment and retain adequate strength to withstand static and cyclic forces encountered during use.

Thermowells are usually solid, cylindrical, metal pieces normally drilled by the use of a gun drill. All MTI wells are machined from solid bar stock material using the latest CNC equipment.

MTI thermowells are available in a variety of materials, styles, and lengths to meet your individual application requirements.

This catalog is intended to help you with your selection of the proper materials, construction style and proper connections.

Give us a call! Our salespeople are knowledgeable and ready to assist you!

## CONTENTS

### Thermowells

Bimetal Stepped (fits 1/4" dia. elements) .....	2
Heavy Duty Tapered (fits 1/4" dia. elements) .....	3
Standard Straight (fits 3/8" dia. elements) .....	4
Heavy Duty Tapered (fits 3/8" dia. elements) .....	5
Socket Weld (fits 1/4" & 3/8" dia. elements) .....	6
Weld-In (fits 1/4" & 3/8" dia. elements) .....	7
Test-Well .....	8
Limited Space .....	8
Industrial Glass Thermometer Well .....	9
Flanged Stepped .....	10
Flanged Straight .....	10
Flanged Tapered .....	10
Specialty Coatings .....	11
Tantalum Sheath for Flanged Thermowells .....	11
Van Stone Well .....	12
Ground Joint .....	12
Metal Protection Tubes .....	13

### Reference

Material Ratings .....	14
Bore Sizes .....	14
Insertion Length .....	14
Corrosive Material Guide .....	15
Pressure/Temperature Material Ratings .....	16
Material Selection Guide .....	17

