
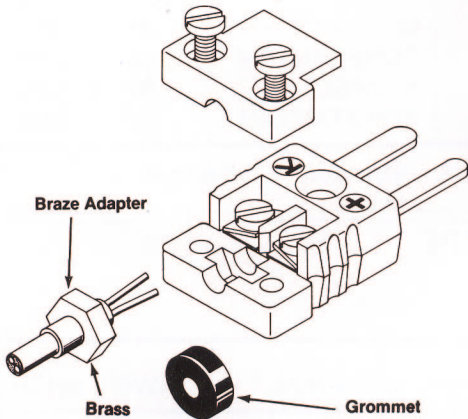


CONNECTORS MINI PLUGS AND JACKS

Exclusive Jab-In® terminals require only ¼" of insulation removed. Wire is sandwiched between contacts of thermocouple alloy without damage. Looped wire ends are eliminated. Simple two-piece construction. Removable cap with semi-captive screws exposes terminals without loose parts falling out. Elastomer bushing provides wire strain relief. Braze-on sheath adapters are brazed or soldered to sheath. Crimp-on adapters are crimped to sheath using crimp tool. Bushings and adapters are locked into connector by cap.

Wire Jab-In®
between contacts

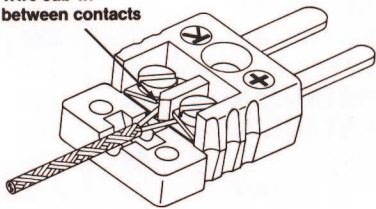


Brass



Hex Crimp Adapter

Nickel Plated
Steel Construction



Crimp Adapter

Threaded bottom
plate (no loose nuts)
SS Mounting Screw

MINI PLUGS AND JACKS 400°F Continuous Ambient

CALIBRATION	CALIB. MARK	COLOR	PLUG PART NO.	JACK PART NO.
Iron Constantan	J	Black	1260-() TYPE Code →	1210-() TYPE Code →
Copper Constantan	T	Blue		
Chromel Alumel™	K	Yellow		
Nicrosil Nisil	N	Orange		
Chromel™ Constantan	E	Violet		
Platinum 10% Rhodium	S	Green		
Platinum 13% Rhodium	R	Green		
Uncompensated (CU)	CU	White		
Tungsten 5% Re/W26% Re	W5	Brown		

HI TEMP MINI PLUGS AND JACKS 800°F Continuous Ambient

Iron Constantan	J	Red	H-1260-() TYPE Code →	H-1210-() TYPE Code →
Copper Constantan	T	Red		
Chromel Alumel™	K	Red		
Nicrosil Nisil	N	Red		
Chromel™ Constantan	E	Red		
Platinum 10% Rhodium	S	Red		
Platinum 13% Rhodium	R	Red		
Uncompensated (CU)	CU	Red		
Tungsten 5% Re/W26% Re	W5	Red		

TM—HOSKINS MFG. CO.

MINI BRAZE ADAPTER

PART NO.	PRICE EA.
1277-*	

Specify Size: Blank, .040", .062", .090", .125"
*Code: 000, 040, 062, 090, 125

MINI WIRE CLAMP


PART NO.	*PRICE EA.
1280	

Prewired connector
can be mounted on clamp
with no reassembly




SS Mounting Screw

SS wire clamp
screws

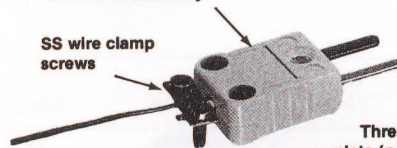

Threaded bottom
plate (no loose nuts)

Nickel plated
Steel construction




MINI WIRE CLAMP

Strain relieves fine wire as well
as heavy insulated wire.

Clamps fine wire
for good strain relief



Holds up to
.165 DIA. insulated wire

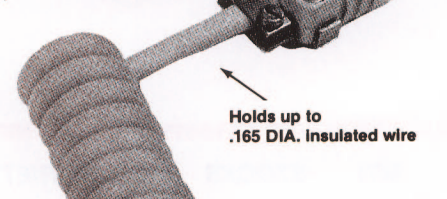

MTI - INDUSTRIAL TEMPERATURE SENSORS

Thermocouples...RTD's...Thermowells..Wire..Cable...Accessories
www.mtisensors.com (972) 436 - 3033 Fax (972) 436 - 2655